

KEST™

Your source for reliable Relays & Sockets

KS2E-M - Series











Miniature Power Relay



E323872



Dimension:	21 x 10 x 12mm
Coil Voltage:	3, 5, 12, 24 VDC
Contact Current (A)	2 A
Coil Power:	0.20W
Contact Rating:	2A/28Vdc 0.5A, 1A/125Vac, 30Vdc
Contact Arrangement:	2 Form C
Max. Switching Power:	48W 60VA
Max. Switching Voltage:	24Vdc 220Vac
Contact Material:	Ag AgNi (Au clad)
Contact Resistance:	≤50m Ω
Insulation Resistance:	1000M Ω
Operating Temperature:	-30°C ~ 70°C
Electrical Life:	10 ⁵ times
Dielectric Strength	Mechanical Life: 10 ⁷ times
Coil and Contact:	500V (50Hz)
Weight (Approx.):	5grams (2oz.) 1000V (50Hz)

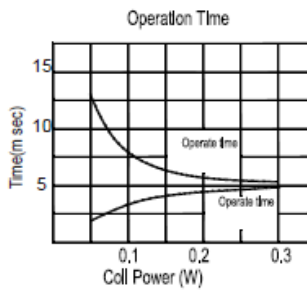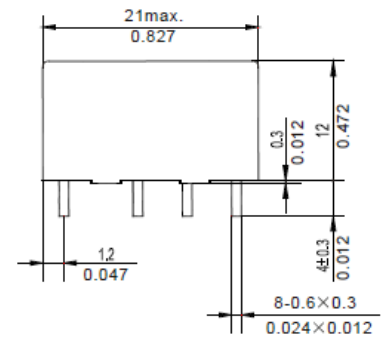

Wiring diagram (Bottom view)

*Comparable to most Industry Standard Application
©Copyright 2010 KEST™ – All rights reserved